
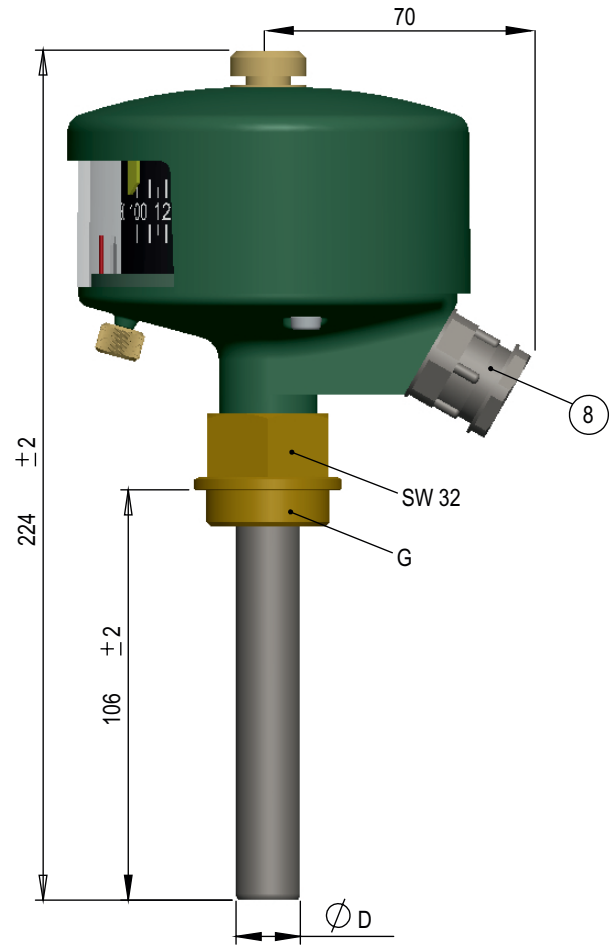


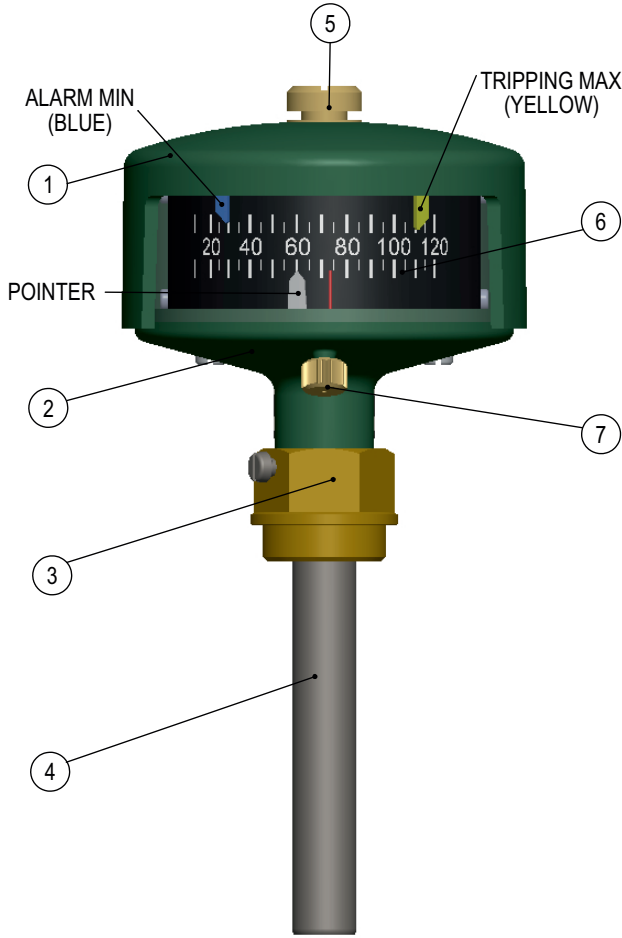


THE ORDERED BI-METAL THERMOMETER IS:

DIMENSION TABLE

	TYPES	G	Ø D
(A)	TEK14	1/2"	15
(B)	TEK16	1"	17
(C)	TEK16*	3/4"	17

CONNECTION DIAGRAM






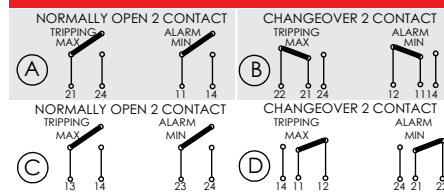


COLOUR SCALE

(A)	RAL 7033
(B)	RAL 7032
(C)	RAL 7035
(D)	RAL 7001






***IP55, ACCUARY: $\pm 5^{\circ}\text{C}$

No.	Q'ty	Description	Explanation
1	1	TOP COVER	ALUMINIUM
2	1	BODY	ALUMINIUM
3	1	CONNECTOR	BRASS
4	1	TUBE	STAINLESS TUBE
5	1	COVER FIXING NUT	BRASS
6	1	SCALE	ALUMINIUM
7	1	SETTING NUT	BRASS
8	1	CONNECTOR	PG16, STAINLESS

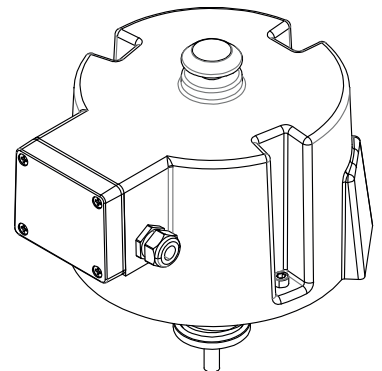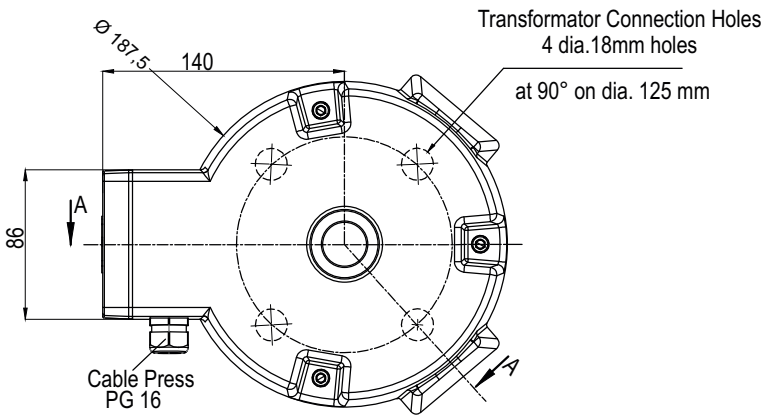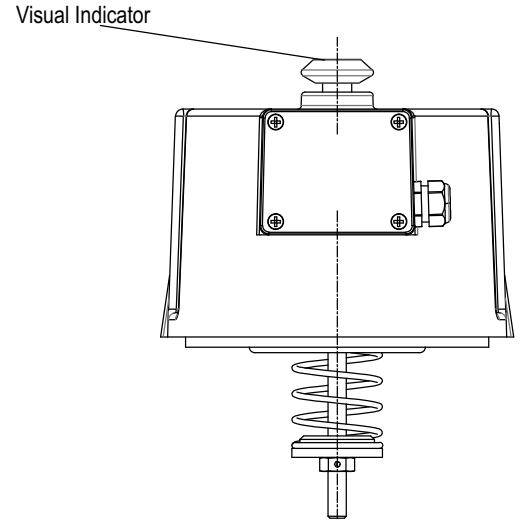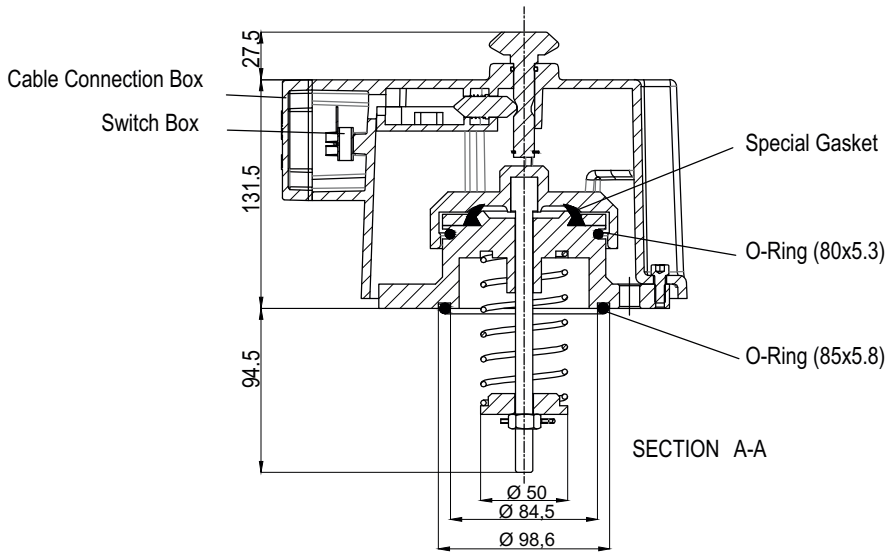

Recommended Maximum Electrical Ratings (Switch Characteristics)

Switch Type	Voltage (V)	Resistive Load (A)	Motor Load (A)	Approvals ENEC		Approvals UL	
				(A)	(V)	(A)	(V)
XCG	250 (AC)	6	2	6 (2)	250 (AC)	5	250 (AC)
XCG	30 (DC)	6	2	6 (2)	30 (DC)	—	—
XCG	125 (AC)	1,5	0,5	1,5 (0,5)	125 (DC)	—	—

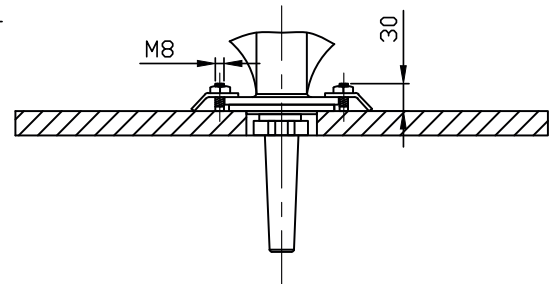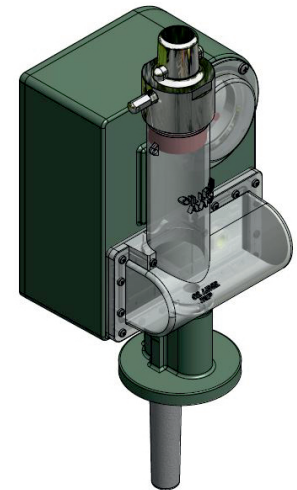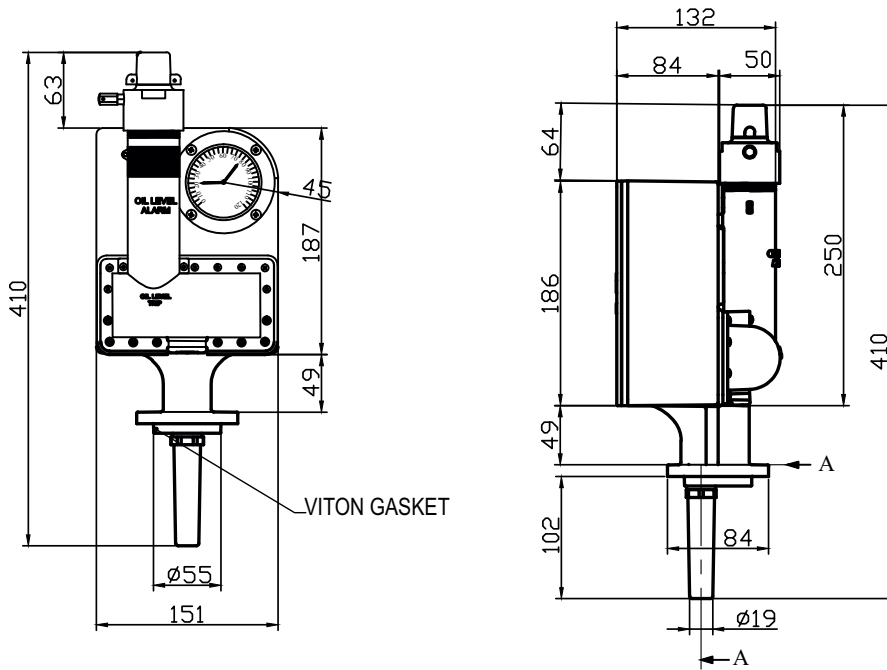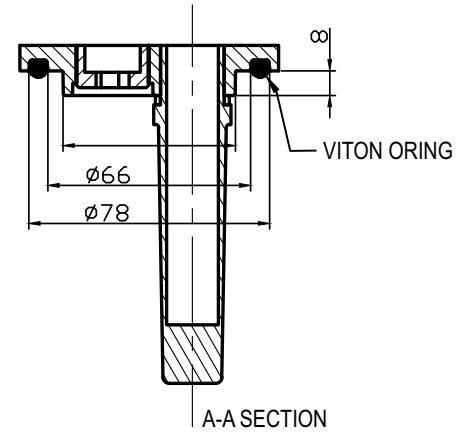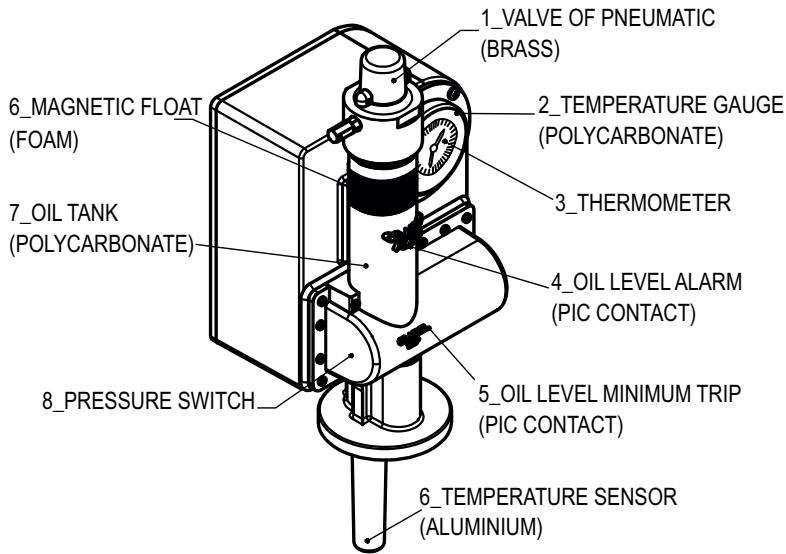

44	42	34	32	24	22	14	12	11	13	14				
41	31	21	11											
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
TEMPERATURE T1 - TRIP			TEMPERATURE T2 - ALARM			PRESSURE			GAS / TRIP			GAS / ALARM		GROUND

